


CONCRETE FRAME SCREW



For Window & Door Frame Installation

*Premium Steel Wire
Bigger Diameter
Reinforced Strength*

15%
Higher Breaking Torque

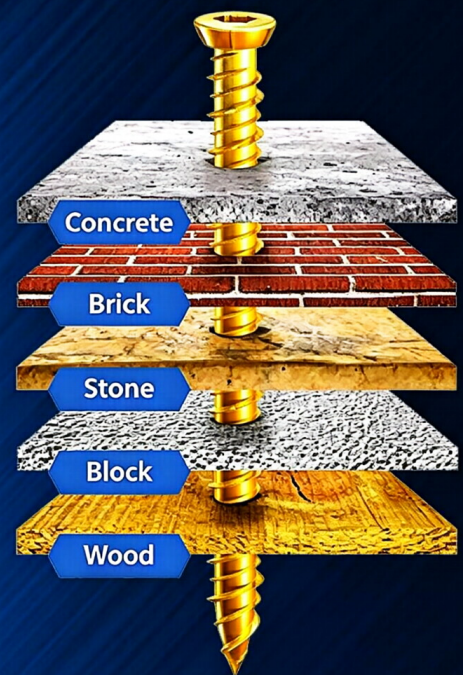


*RoHS Zinc
Golden Color*

Suitable for Multiple Materials

www.ecindustry.com



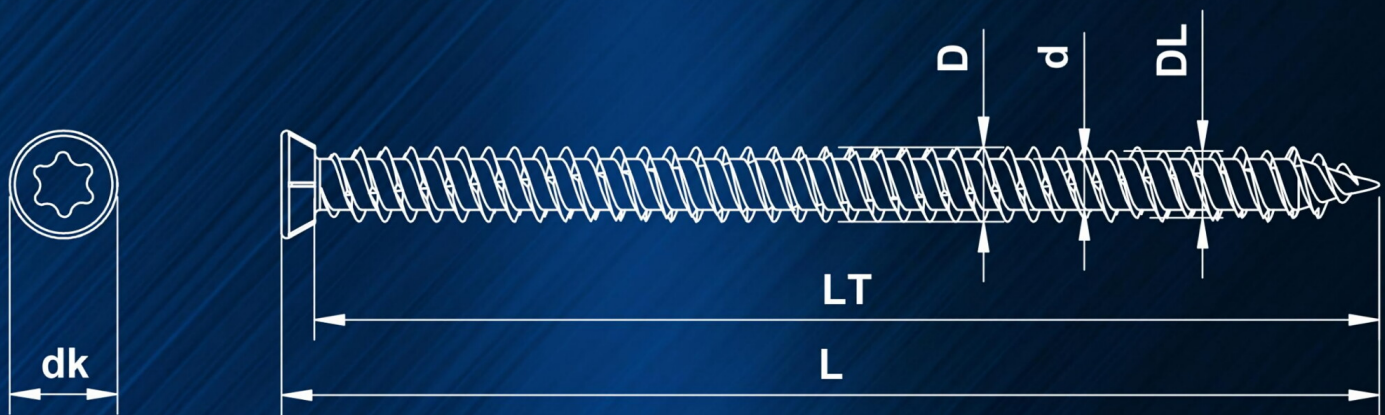

Geometric Properties	Nominal Ø [mm]	7.5
	Shaft Øs [mm]	5.7
	Inner Øi [mm]	5.2
Mechanical Properties	Tensile Rm [Mpa]	≥1000
	Yield Rp0.2 [Mpa]	≥900
	Shear τ[KN]	2.4
	Surface Hardness[HV]	490~750
	Core Hardness[HV]	320~470
	Torque [N·m]	≥20
	Bending [°]	≥25°



Geometric Properties

Nominal Ø [mm]	Drive	dk	D	d	LT
7.5	TX30	Ø11.0~12.0	Ø7.3~7.6	Ø5.2	Full Thread

Size	Length	Head	Drive	Material	Finish	Thread Feature
7,5 x 52	52MM	Trim Countersunk Torx Head	T30	1022	Zinc & Yellow Passivated	Deep High/Low Thread
7,5 x 62	62MM	Trim Countersunk Torx Head	T30	1022	Zinc & Yellow Passivated	Deep High/Low Thread
7,5 x 72	72MM	Trim Countersunk Torx Head	T30	1022	Zinc & Yellow Passivated	Deep High/Low Thread
7,5 x 82	82MM	Trim Countersunk Torx Head	T30	1022	Zinc & Yellow Passivated	Deep High/Low Thread
7,5 x 102	102MM	Trim Countersunk Torx Head	T30	1022	Zinc & Yellow Passivated	Deep High/Low Thread
7,5 x 112	112MM	Trim Countersunk Torx Head	T30	1022	Zinc & Yellow Passivated	Deep High/Low Thread
7,5 x 122	122MM	Trim Countersunk Torx Head	T30	1022	Zinc & Yellow Passivated	Deep High/Low Thread
7,5 x 132	132MM	Trim Countersunk Torx Head	T30	1022	Zinc & Yellow Passivated	Deep High/Low Thread
7,5 x 152	152MM	Trim Countersunk Torx Head	T30	1022	Zinc & Yellow Passivated	Deep High/Low Thread
7,5 x 182	182MM	Trim Countersunk Torx Head	T30	1022	Zinc & Yellow Passivated	Deep High/Low Thread
7,5 x 212	212MM	Trim Countersunk Torx Head	T30	1022	Zinc & Yellow Passivated	Deep High/Low Thread