

DIAMOND POINT CRACK - PROOF DECKING SCREW



Designed for Hard Wood & Split - Prone Wood



Premium
Engagement



Torx Plus



Cylindrical Head For
Clean Surface

Strong Clamping Effect

X2
Efficiency
**NEAT
FINISH**



Ultra Fast



Zero Predrilling



Crack-Proof

Suitable for
Multiple Timber
Materials




Hard Wood
800kg/m³ MAX



Pine Wood
400kg/m³ MAX

www.ecindustry.com



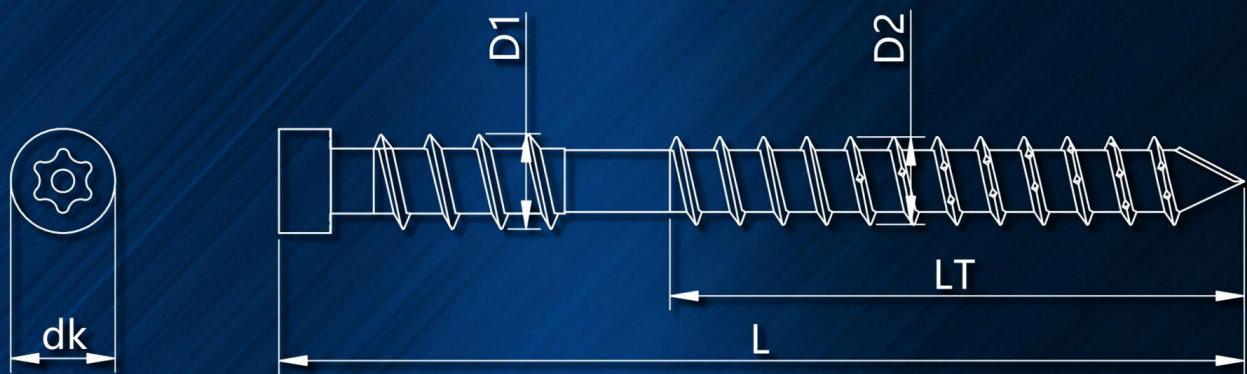

Geometric Properties

Nominal Ø [mm]	Drive	dk	D1	D2	LT	L
5.0	TX20	6.2	5.4	5.0	18.0	50.0
					28.0	60.0
5.7	TX25	6.9	6.1	5.7	38.0	65.0
					43.0	75.0

Size	Length	Head	Drive	Material	Finish
5.0mm 10G	50mm	Cylindrical	Torx T20	Carbon Steel / Stainless Steel	RXB Coating / Passivated / Baked Bronze
5.0mm 10G	60mm	Cylindrical	Torx T20	Carbon Steel / Stainless Steel	RXB Coating / Passivated / Baked Bronze
5.0mm 10G	65mm	Cylindrical	Torx T20	Carbon Steel / Stainless Steel	RXB Coating / Passivated / Baked Bronze
5.0mm 10G	75mm	Cylindrical	Torx T20	Carbon Steel / Stainless Steel	RXB Coating / Passivated / Baked Bronze
5.7mm 12G	50mm	Cylindrical	Torx T25	Carbon Steel / Stainless Steel	RXB Coating / Passivated / Baked Bronze
5.7mm 12G	65mm	Cylindrical	Torx T25	Carbon Steel / Stainless Steel	RXB Coating / Passivated / Baked Bronze
5.7mm 12G	75mm	Cylindrical	Torx T25	Carbon Steel / Stainless Steel	RXB Coating / Passivated / Baked Bronze