


FEMALE HURRICANE BOLT



Flush-mounting for Hurricane Shutters

Tested to Tough Miami-Dade Hurricane Standards

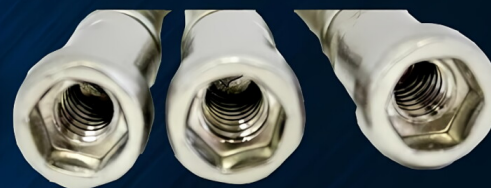

5/16" Hex Drive
1/4"-20 Female Threads
1/2" Deep Pocket



Hex Drive for a Flush
Unobtrusive Exterior Finish

Gap-free Head Seal




Oversized 14-10 Tooth Threads to
Provide Installation Flexibility

Suitable for Concrete, Block or Wood

www.ecindustry.com



1/4"-20 UNC 2A

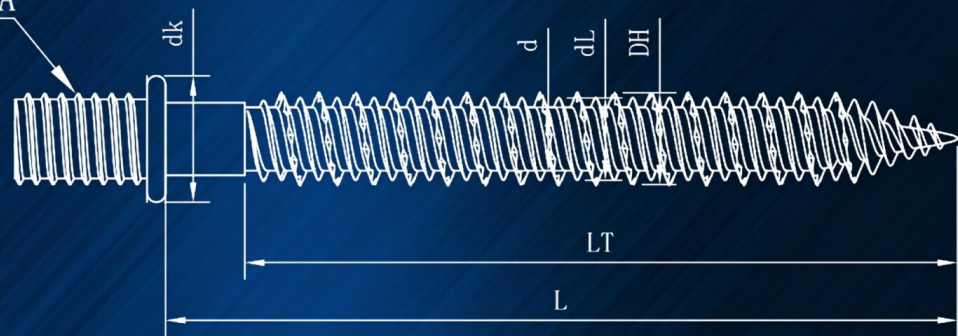

Geometric Properties	Nominal Ø [mm]	7.0
	Shaft Øs [mm]	5.5
	Inner Øi [mm]	4.8
Mechanical Properties	Tensile Rm [Mpa]	≥1000
	Yield Rp0.2 [Mpa]	≥900
	Shear τ[KN]	2.6
	Surface Hardness[HV]	450~650
	Core Hardness[HV]	320~450
	Torque [N·m]	≥16.8
	Bending [°]	≥25°



Geometric Properties							
Nominal Ø [mm]	Drive	dk	DH	dL	d	LT	L
6.5	1/4 -20 Nut	Ø 9.40~9.80	Ø 6.85~7.15	Ø 6.06~6.35	Ø 4.65~4.95	55.0	60.0
Material	Carbon Steel						
Coating	Dacromet						