

SONIC DECK SCREW



Twin -Threads Design Delivers Unprecedented Penetration Efficiency

*Upper Threads Lock
The Deck and Timber Block*

Prevents Splitting

X2
Speedy
ZERO
PREDRILLING





*Twin Cutting Threads
Less Entry Force*

*Suitable for
Multiple Timber
Materials*



www.ecindustry.com



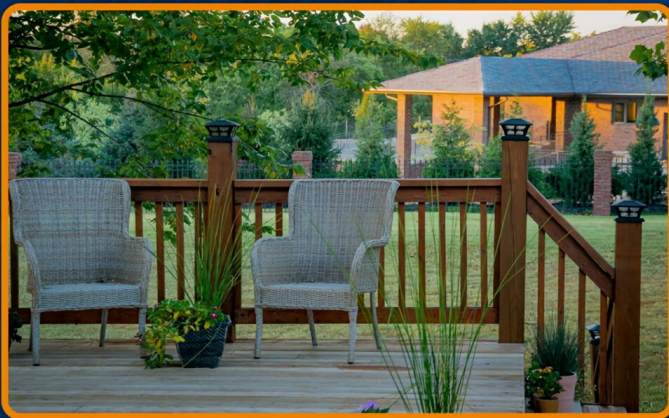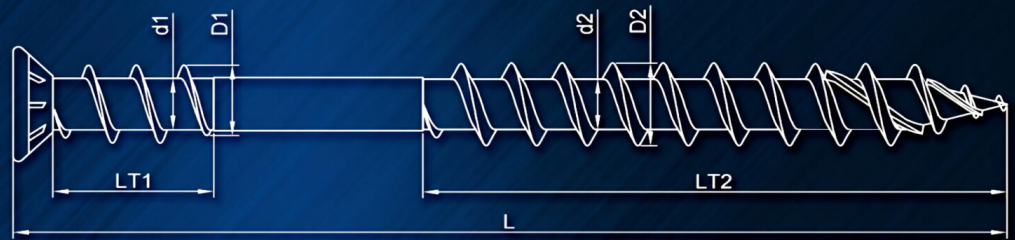

Geometric Properties

Nominal Ø [mm]	Drive	dk	D1	d1	D2	d2	LT1	LT2	L
6.5	TX20	Ø 8.00	Ø 5.00	Ø 3.60	Ø 5.00	Ø 3.40	10.0	32.0	50.0
								40.0	60.0
								50.0	75.0

Size	Length	Head	Drive	Material	Finish	Thread Feature	Slot & Tip
4.8mm 10G	60mm	Countersunk	Torx T20	SS 304 / 316	Passivated & Wax / Baked Bronze / Black Dacromet	Double Locking Thread	Turbo Cut Tip
4.8mm 10G	65mm	Countersunk	Torx T20	SS 304 / 316	Passivated & Wax / Baked Bronze / Black Dacromet	Double Locking Thread	Turbo Cut Tip
4.8mm 10G	75mm	Countersunk	Torx T20	SS 304 / 316	Passivated & Wax / Baked Bronze / Black Dacromet	Double Locking Thread	Turbo Cut Tip
5.5mm 12G	65mm	Countersunk	Torx T25	SS 304 / 316	Passivated & Wax / Baked Bronze / Black Dacromet	Double Locking Thread	Turbo Cut Tip
5.5mm 12G	75mm	Countersunk	Torx T25	SS 304 / 316	Passivated & Wax / Baked Bronze / Black Dacromet	Double Locking Thread	Turbo Cut Tip
5.5mm 12G	90mm	Countersunk	Torx T25	SS 304 / 316	Passivated & Wax / Baked Bronze / Black Dacromet	Double Locking Thread	Turbo Cut Tip