




Geometric Properties	Nominal Ø [mm]	7.5
	Shaft Øs [mm]	5.9
	Inner Øi [mm]	5.5
Mechanical Properties	Tensile Rm [Mpa]	≥800
	Yield Rp0.2 [Mpa]	≥640
	Shear τ[KN]	1.5
	Surface Hardness[HV]	450~750
	Core Hardness[HV]	320~450
	Torque [N·m]	≥20
	Bending [°]	≥25°

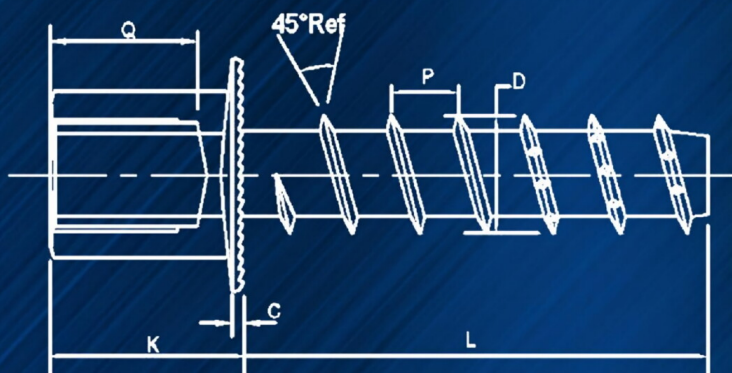


Size	External Major Diameter	Internal Thread	Material	Finish
M6x35mm	7.8mm	M8-1.25	Carbon Steel	Zinc Plated
M6x40mm	7.8mm	M8-1.25	Carbon Steel	Zinc Plated
M6x45mm	7.8mm	M8-1.25	Carbon Steel	Zinc Plated
M6x55mm	7.8mm	M8-1.25	Carbon Steel	Zinc Plated
M6x35mm	7.8mm	M10-1.5	Carbon Steel	Zinc Plated
M6x40mm	7.8mm	M10-1.5	Carbon Steel	Zinc Plated
M6x45mm	7.8mm	M10-1.5	Carbon Steel	Zinc Plated
M6x55mm	7.8mm	M10-1.5	Carbon Steel	Zinc Plated
1/4x1-1/2	8mm	1/4-20	Carbon Steel	Zinc Plated
1/4x1-3/4	8mm	3/8-16	Carbon Steel	Zinc Plated
3/8x2-3/4	12mm	1/2-13	Carbon Steel	Zinc Plated

THREADED COUPLING CONCRETE BOLT



Used in Concrete Ceilings to Secure Studs

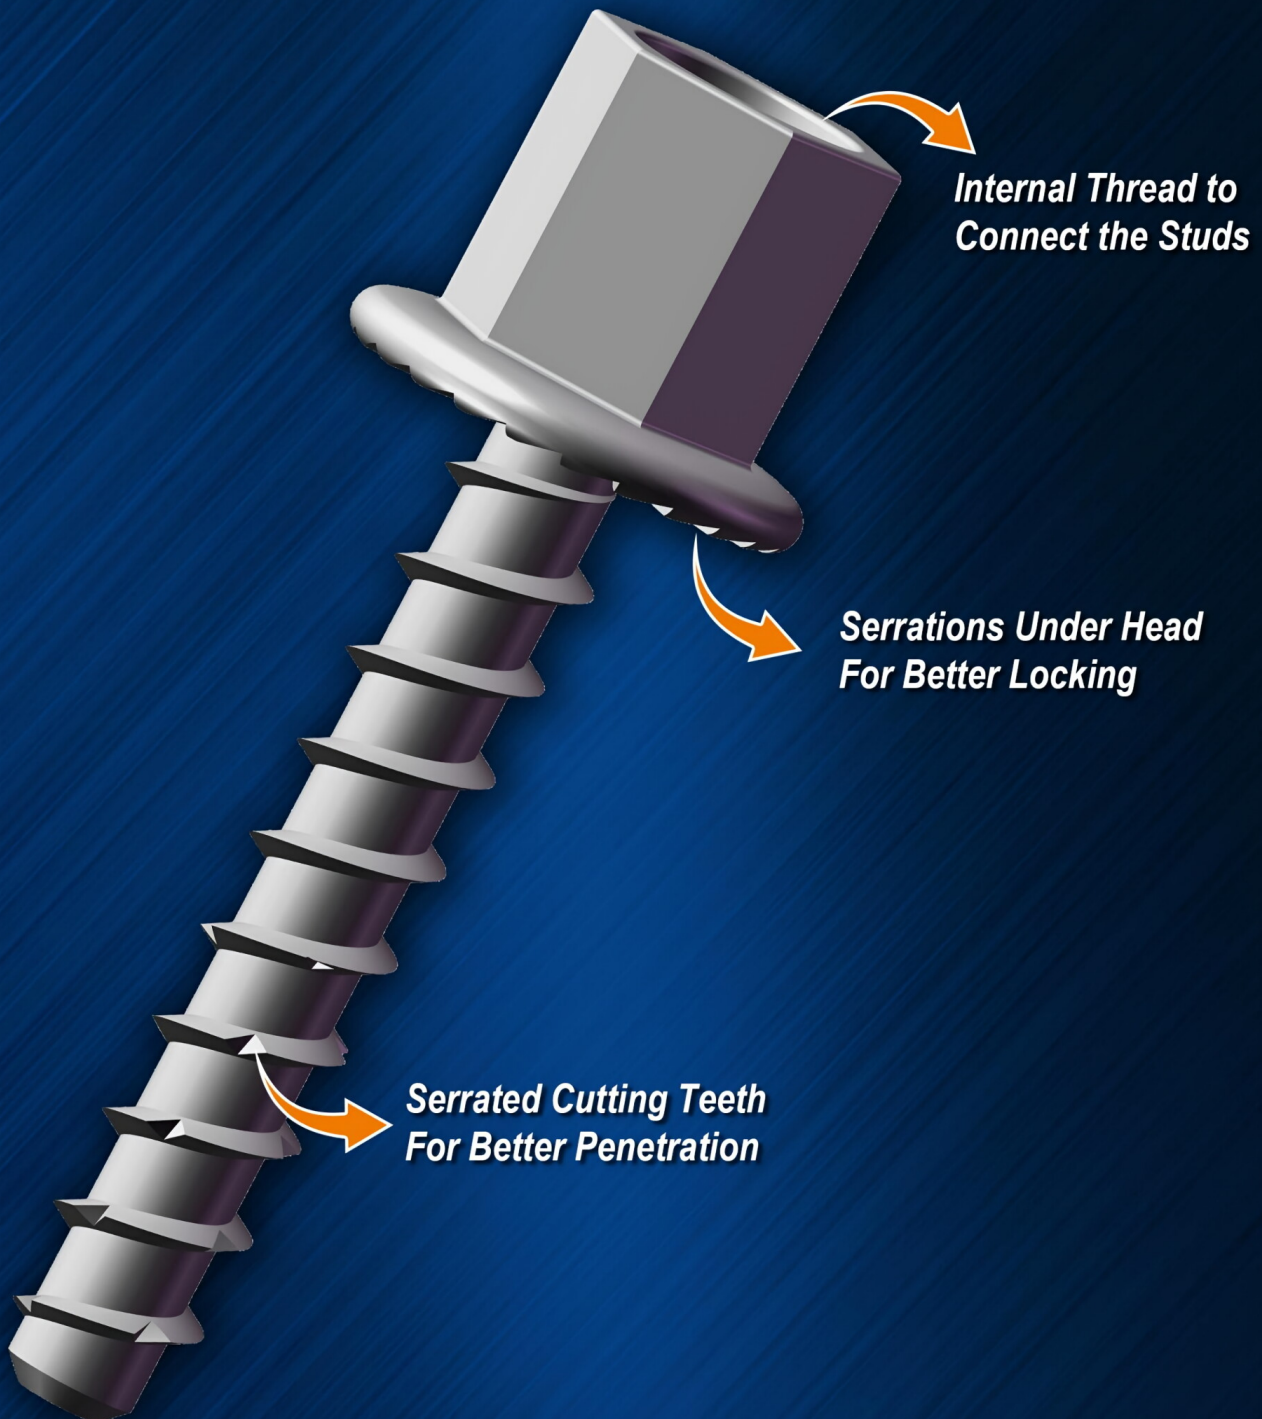

Suitable for Multiple Concrete / Masonry Materials

www.ecindustry.com

